






Electronic Technology

ET-A1 Built-in
Helmets Communication System


Quick Reference Manual

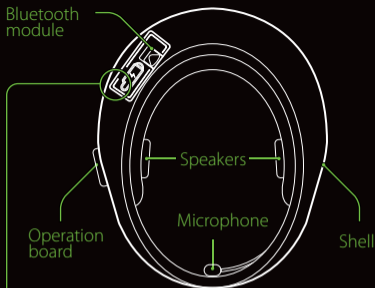

Bluetooth charge board



Bluetooth module inner

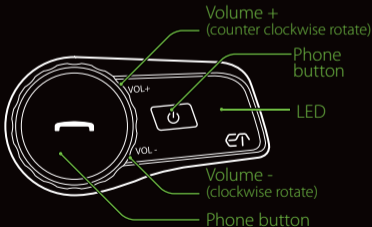

Bluetooth operation board

- **Power on**

Push and hold the "Power" button for at least 2 seconds to power on. The blue LED turns on and you will hear ascending beeps and "Power on".

- **Power off**

Push the "Power" and "Phone" button at the same time for 0.2 seconds, the red LED turns on for about 1 second until it turns off completely and you will hear "Power off".

- **Pairing with Phone**

Please make sure the ET-A1 is power off position. Push the "Power" button for at least 5 seconds till the LED flashes in red and blue alternately and you will hear a voice prompt saying "Pairing" in the speakers. Enable your Bluetooth function on your mobile phone. Your mobile phone will now scan nearby devices and find a device named "BLUETOOTH HELMET". Please allow your mobile phone to pair with this device. When pairing has completed the ET-A1 is ready to use. You will

hear a voice prompt from the ET-A1 saying "Pairing successful" in the speakers.

Once pairing between the two devices is successful, The LED lights on the ET-A1 will change from red and blue flashing lights to a blue LED light only.

Note: if PIN code is required by your mobile phone, please enter "0000".

If you paired with your phone and ET-A1, ET-A1 will connect your phone automatically when you turn it on again.

- Pairing with a second Bluetooth device or mobile phone

Multipoint Bluetooth pairing allows the ET-A1 to connect two Bluetooth devices at the same time. You can pair the first and second Bluetooth device or mobile phone to the ET-A1 by following the simple procedures in “Pairing with your mobile phone”.

After second Bluetooth device or mobile phone confirms that pairing has completed, select the ET-A1 in the list of the devices on your first Bluetooth device or mobile phone.

After the first Bluetooth device or mobile phone confirms the pairing has completed an the ET-A1 is ready to use for two Bluetooth devices or mobile phones.

- **Intercom**

The ET-A1 can be paired with another headset for Bluetooth intercom conversation.

1. Turn on the two ET-A1 headsets (A and B) that you would like to pair with each other.

2. Press and hold the "Power" button of the headset A and B for 2 seconds until the LED flashes red and blue alternately. You will hear a voice prompt saying "Pairing".

3. Simply press the "Power" button of either of the two headsets A or B (It doesn't matter that you choose A or B) and wait until the LEDs of both headsets turn to blue and intercom connection is automatically established. When you press the "Power" button, you will hear a voice prompt saying "Searching". And after pairing successful, you will hear a voice prompt saying "Pairing successful".

If the pairing process is not completed within two minutes, the ET-A1 will return to stand-by mode.

- **Connection with phone**

ET-A1 will connect with your phone automatically when it turn on. If ET-A1 is turn on, you can simply press "Phone" button, it will connect with your phone.

- **Voice control commands**

Press and hold for 2 seconds the button "Phone" and you can use voice commands with your Smartphone.

- **To redial the last number**

Double click the "Phone" button in stand-by mode that will redial the last number. You will hear a voice prompt saying "redialing".

- **Call answer**

When you have an incoming call, simply press "Phone" button to answer the call, or ET-A1 will automatically answer the call after 8 seconds.

- Call reject

To reject a call, please double click the "Phone" button. You will hear a voice prompt saying "call rejected".

- Call terminate

To end a call, please simply press the "Phone" button when calling. You will hear a voice prompt saying "call terminated".

- Music play/pause

To play or pause music, simply press "Phone" button in stand-by mode.

- To track forward or track back

Long press "Phone" button about 2 seconds when playing music, you can rotate "Phone" button to track forward or track back in 5 seconds, counter-clockwise will track forward, and clockwise will track back.

- **Starting and Ending Intercom conversation**

1. You can start an intercom conversation with your intercom friend by press "Power" button once.

2. To terminate an intercom conversation, press "Power" once again.

- **Adjust volume**

You can adjust the volume when intercom calling music playing, counter-clockwise will add volume, and clockwise will decrease volume. Please loudly speak when speaking and nearby the microphone, otherwise the microphone will stop working in 5 seconds if the sound is low, and when you speaking again, the microphone also will working again.

- **Pair with ET300**

Press "Phone" button about 7 seconds untill blue led lighting in stand-by mode. Then operate ET300 complete paring.

- **Remote control**

Press the grey button (music button) to play music in your mobile phone if there is no music is playing. Push the grey music button again to pause the music.

Double click the green button when ET-A1 in stand-by mode that will start the voice call. When there is an incoming call, you can press green button to answer the call.

Double click the green button reject the call when incoming call.

Press the green button to terminate the call when calling. Press the green button to establish the intercom when ET-A1 in the stan-by mode, and press again to terminate the intercom.

If you paired the ET-A1 with ET200, when you press the RED button, the walkie talkie will be into sending state. After you release it, the walkie talkie will be into receiving state.

Press Volume + button track forward song.

Long press this button to increase the volume.

Press Volume - button to track back song.

Long press this button to decrease the volume.

- **Voice Prompt Indicator for battery capacity**

When you power off the headset, simply press the "Power" button for 1 second, then you will hear a voice prompt indicating the battery level.

"Battery full", 70 ~ 100%

"Battery fifty percent, 30 ~ 70%

"Battery low", 0 ~ 30%

- **Low battery Warning**

When the battery is low, the red LED will blinking for every 30 seconds, and you will hear a voice prompt saying "Battery low".

- **Charging the ET-A1**

You can charge the ET-A1 by connecting the supplied USB cable into a computer USB port or USB wall charger. LED indicator shows stable red while the device is charging and LED indicator turn off when battery is fully charged. It takes about 3 hours to fully charge.

- Connection with other device

If you have a stand alone Bluetooth device, follow the pairing procedure separately. The procedure is the same as the procedure of "Mobile phone pairing".

- Device update

All ET owners get access to free firmware upgrades, which ensure your ET-A1 is always operating at peak performance.

- Reset system

Press once the reset button will reset the system.


- Turn off after use




Electronic Technology

ITALIANO


Manuale di Istruzioni

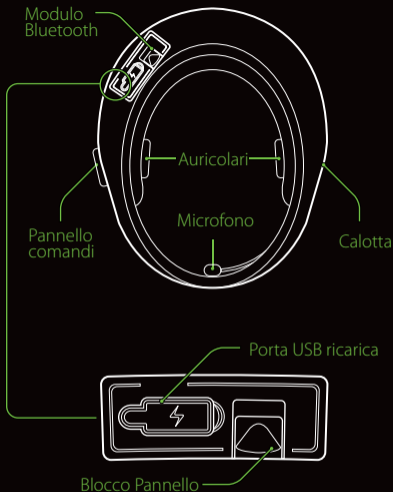

Modulo Ricarica Bluetooth



Modulo interno Bluetooth

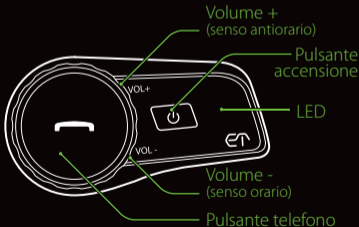

Pannello comandi Bluetooth

- **Accensione**

Tenere premuto per almeno 2 secondi il pulsante "Accensione"; il LED blu si accenderà e si sentirà un beep ascendente e la frase "Power On".

- **Spegnimento**

Tenere premuti contemporaneamente i pulsanti "Accensione" e "Telefono" per almeno 2 secondi, il LED Rosso si accenderà per circa 1 secondo e si sentirà la frase "Power off".

- **Accoppiamento con il telefono**

Assicuratevi che il modulo ET-A1 sia spento; Tenere premuto per almeno 5 secondi il pulsante "Accensione" fino a che entrambi i LED blu e rosso alternandosi inizino a lampeggiare e udirete la parola "Pairing". Sul vostro telefono abilitate la funzione di ricerca Bluetooth, e troverete il dispositivo "Bluetooth Helmet"; Autorizzate l'accoppiamento con il modulo, (se il telefono chiede il codice inserire 0000), udirete la frase "Pairing successful".

Una volta conclusa l'operazione i led rosso e blu smetteranno di lampeggiare e rimarrà acceso solo quello blu.

Nota: se il telefono chiede un PIN code inserire "0000".

Una volta conclusa l'operazione, il modulo ET-A1 si conatterà in automatico al telefono tutte le volte che lo accenderete.

- **Accoppiamento con un secondo dispositivo Bluetooth**

Multipoint Bluetooth Pairing permette l'accoppiamento contemporaneo del ET-A1 con 2 dispositivi Bluetooth.

Potete accoppiare il primo ed il secondo dispositivo seguendo la procedura descritta precedentemente al capitolo "Accoppiamento con il telefono".

Dopo aver terminato la seconda procedura di accoppiamento con il dispositivo, dal primo dispositivo selezionate nuovamente il dispositivo ET-A1, a questo punto il modulo è pronto per poter essere utilizzato contemporaneamente da 2 dispositivi.

- **Intercom**

Il modulo ET-A1 può essere connesso con un altro modulo per essere utilizzato in modalità Intercom tra 2 caschi.

1. Accendere entrambi i moduli che volete collegare.
2. Tenere premuto il pulsante "accensione" per due

secondi su entrambi i moduli fino a che i LED blu e rosso inizieranno a lampeggiare e udirete la frase "Pairing".

3. Premere il pulsante "Accensione" nei due moduli, (non importa se prima uno o l'altro) fino a quando rimarrà acceso solamente il LED blu; a questo punto la connessione sarà impostata. Quando premerete il pulsante "Accensione" udirete la frase "Searching" e dopo che il modulo si sarà connesso all'altro udirete la frase "Pairing successful".

Se la procedura di accoppiamento non viene eseguita entro 2 minuti, il modulo ET-A1 tornerà in modalità stand-by.

• Connessione con il telefono

Il modulo ET-A1 si connette automaticamente al vostro telefono quando lo accendete (solo dopo aver eseguito la procedura iniziale di accoppiamento al primo utilizzo). Nel caso in cui sia già acceso, basterà premere il pulsante "Telefono" e la connessione avverrà in automatico.

- **Comandi vocali**

Tenere premuto per almeno 2 secondi il pulsante "Telefono" e potrete usare i comandi vocali con il vostro Smartphone.

- **Richiamare l'ultimo numero**

Premere velocemente 2 volte il pulsante "Telefono" per richiamare l'ultimo numero, udirete la frase "Redialing".

- **Rispondere ad una chiamata in arrivo**

Quando ricevete una chiamata, premere semplicemente il pulsante "Telefono", oppure attendere 8 secondi e il modulo ET-A1 risponderà in maniera automatica.

- **Rifiutare una chiamata**

Per rifiutare una chiamata, premere 2 volte il pulsante "Telefono", udirete la frase "Call rejected".

- **Terminare una chiamata**

Per terminare una chiamata premere il pulsante "Telefono", udirete la frase "Call terminated".

- **Ascoltare o mettere in pausa la Musica**

Per ascoltare o mettere in pausa la musica, premere semplicemente il pulsante "Telefono".

- **Passare al brano successivo o quello precedente**

Quando state ascoltando musica, tenere premuto per almeno 2 secondi il pulsante "Telefono" e successivamente ruotate il pulsante "Telefono" in senso antiorario per passare al brano successivo, in senso orario per passare a quello precedente.

- **Iniziare e finire una conversazione Intercom**

1. Potete iniziare una conversazione Intercom premendo il pulsante "Accensione" una sola volta.

2. Per terminare una conversazione Intercom premete nuovamente il pulsante "Accensione".

- **Regolare il Volume**

Potete regolare il volume durante una chiamata, una conversazione Intercom o mentre ascoltate musica ruotando in senso antiorario il pulsante "Telefono" per aumentarlo, in senso orario per diminuirlo. Si consiglia di parlare forte e vicino al microfono durante una conversazione, altrimenti il microfono andrà in standby dopo 5 secondi, per riattivarsi appena ricominciate a parlare.

- **Accoppiare con il comando ET300**

Premere il pulsante "Telefono" per circa 7 secondi fino a quando il LED blu inizierà a lampeggiare in modalità standby. A questo punto completate la procedura sul dispositivo ET300.

- **Controllo remoto con ET300**

Premere il pulsante grigio (pulsante musica) per ascoltare la musica dal vostro smartphone se questa non è in esecuzione, premere nuovamente il pulsante grigio per mettere in pausa.

Premere due volte velocemente il pulsante verde

quando il modulo ET-A1 è in standby per iniziare una chiamata vocale. Per rispondere ad una chiamata in arrivo premere il pulsante verde. Per rifiutare una chiamata in arrivo premere due volte velocemente il pulsante verde.

Per terminare una chiamata premere il pulsante verde. In modalità standby premere il pulsante verde per iniziare una conversazione Intercom, premerlo nuovamente per chiudere la conversazione Intercom.

Se avete accoppiato il modulo ET-A1 con ET200, quando premete il pulsante Rosso il Walkie Talkie andrà in modalità trasmissione, appena rilasciate tornerà in modalità ricezione.

Premere il pulsante Volume+ per passare al brano successivo, tenere premuto il pulsante a lungo per aumentare il volume. Premere il pulsante Volume- per tornare al brano precedente, tenere premuto il pulsante a lungo per diminuire il volume.

- **Indicatore vocale del livello di carica della batteria**

Quando il modulo è spento, premere per 1 secondo il pulsante "Accensione", sentirete una voce indicare il livello di carica della batteria:

"Battery Full": 70/100%

"Battery Fifty percent": 30/70%

"Battery Low": 0/30%

- **Avviso batteria scarica**

Quando la batteria è prossima all'esaurimento della carica, il LED rosso inizierà a lampeggiare ogni 30 secondi, e ascolterete una frase "Battery low".

- **Ricarica ET-A1**

Il modulo ET-A1 può essere caricato connettendo il cavo USB ad una porta sul computer oppure ad un caricabatterie standard. Il LED rosso si illuminerà durante la ricarica, e si spegnerà alla fine della ricarica; il tempo impiegato per una ricarica completa è circa 3 ore.

- **Connessione con altri dispositivi**

Se avete un dispositivo bluetooth standard seguire le indicazioni sia del dispositivo sia quelle descritte sopra.

- **Aggiornamento del dispositivo**

Tutti gli utenti hanno libero accesso agli aggiornamenti firmware per il modulo ET-A1 in modo da avere sempre il dispositivo al top delle performance.

- **Reset system**

Per resettare il modulo premere una volta il pulsante reset.

- **Spegnere dopo l'uso**



Hongkong ET Technology Co., Ltd.

Service Hotline: 400-656-3133

Made in China